



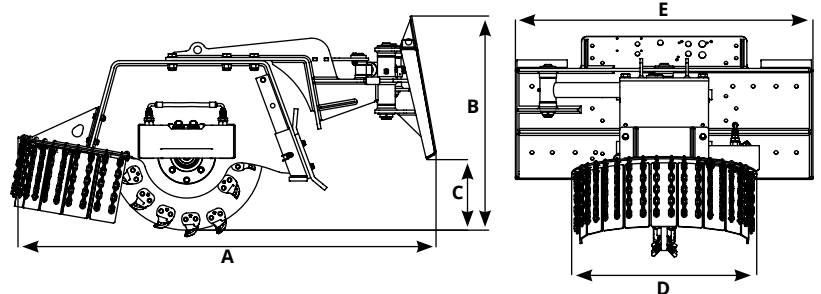

# OSZILLIERENDE FRONT-WURZELSTOCKFRÄSE FÜR SKID LOADER UND WHEEL LOADER

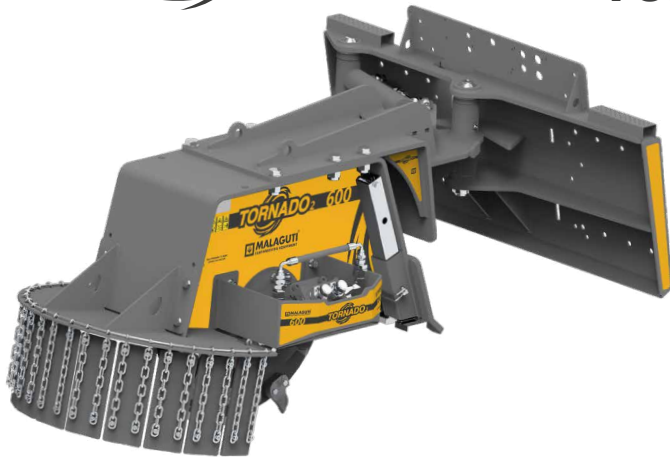

MODEL	Tornado 2F 350	Tornado 2F 450	Tornado 2F 600	Tornado 2F 600 PLUS
A (mm)	1435	1490	1650	1650
B (Ømm)	595	695	860	860
C (mm)	20	120	285	285
D (mm)	610	610	730	730
E (mm)	1170	1170	1170	1170
Motor (CC)	12 18 25 28 32	25 28 32	45 50 63	80
Öldurchsatz (L/Min)	16 24 32 36 42	32 36 42	56 64 80	110
RPM	1330 1330 1280 1280 1315	1280 1280 1315	1290 1300 1300	1375
Gewicht ohne Kupplung (Kg)	246	300	408	408
Anzahl der Zähne	16	20	28	28
Druck (BAR)	250	250	250	250
Max. Gegendruck (BAR)	15	15	15	15

## KIT DRAINAGE

HYDRAULIC KIT 4 HOSES + DRAINAGE WITH MOTOR FLOW ADJUSTMENT

HYDRAULIC KIT 2 HOSES + DRAINAGE WITH MOTOR FLOW ADJUSTMENT + SWING

HYDRAULIC KIT 4 HOSES + DRAINAGE (adjustment is managed by the host machine)

## Model

COUPLING TO LOADER  
Supplement for BLADES

