



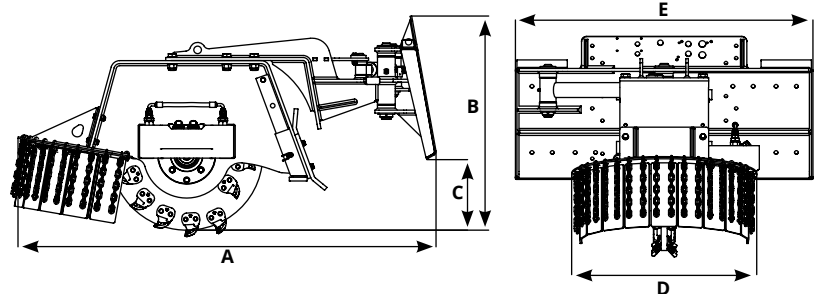

Rogneuse de souches frontale oscillante pour SKID LOADER et WHEEL LOADER

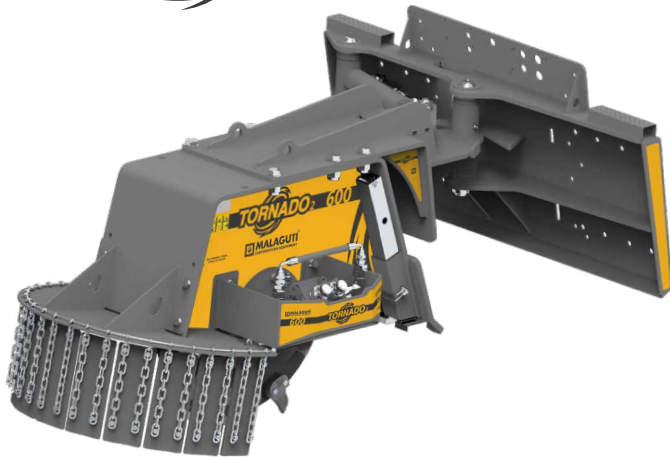

MODEL	Tornado 2F 350	Tornado 2F 450	Tornado 2F 600	Tornado 2F 600 PLUS
A (mm)	1435	1490	1650	1650
B (Ømm)	595	695	860	860
C (mm)	20	120	285	285
D (mm)	610	610	730	730
E (mm)	1170	1170	1170	1170
Moteur (CC)	12 18 25 28 32	25 28 32	45 50 63	80
Débit d'huile (L/Min)	16 24 32 36 42	32 36 42	56 64 80	110
RPM	1330 1330 1280 1280 1315	1280 1280 1315	1290 1300 1300	1375
Poids (Kg)	246	300	408	408
Numéro de dents	16	20	28	28
Pression (BAR)	250	250	250	250
Contre-pression Max. (BAR)	15	15	15	15

KIT DRAINAGE

HYDRAULIC KIT 4 HOSES + DRAINAGE WITH MOTOR FLOW ADJUSTMENT

HYDRAULIC KIT 2 HOSES + DRAINAGE WITH MOTOR FLOW ADJUSTMENT + SWING

HYDRAULIC KIT 4 HOSES + DRAINAGE (Le réglage est géré par la machine opératrice)

Model

COUPLING TO LOADER
supplément pour PALE

